



**dual overcenter valve
series VBCD.DE/A**

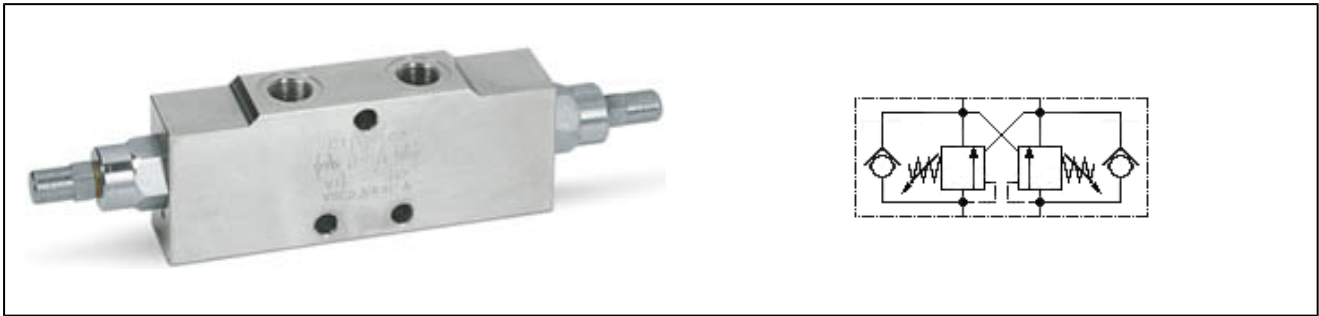


design	for mounting in pipes, internal pilot
connection	G1/4"...G1" according to ISO228/1
materials	body zinc plated steel, inner parts hardened steel, seals NBR
medium temperature	-20°C...+100°C
medium	hydraulic oil, other media on request

dimensions

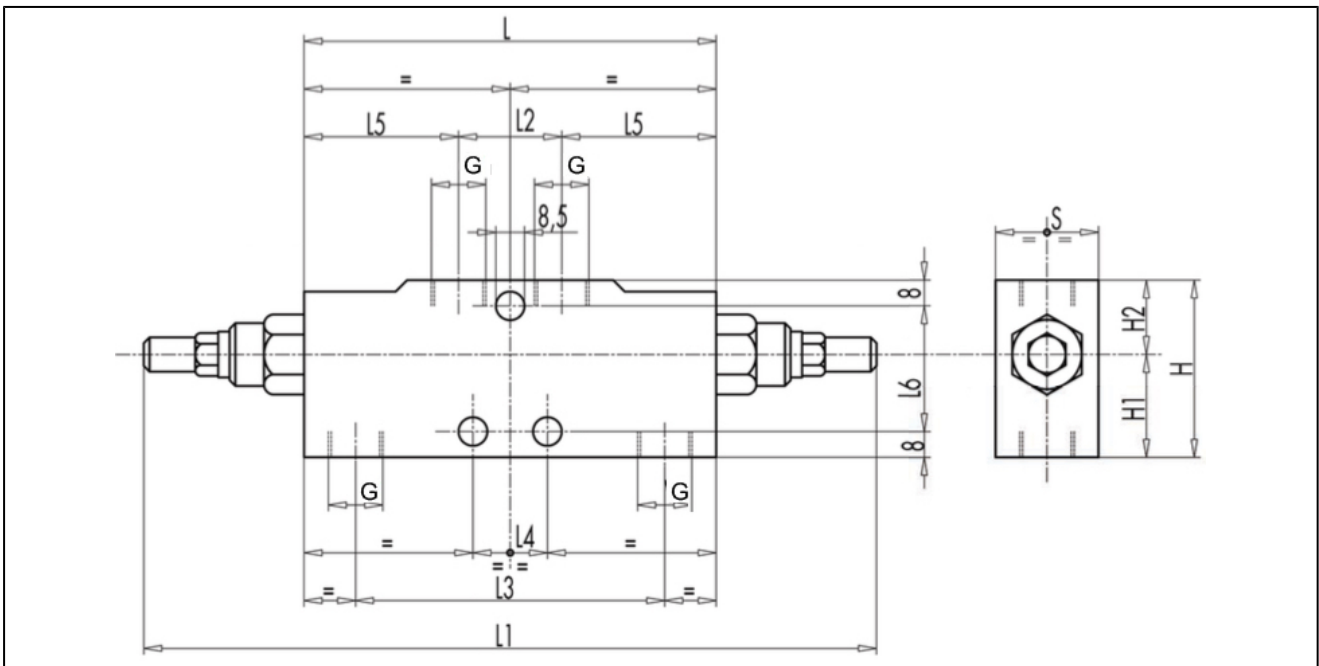

G	H	H1	H2	L	L1	L2	L3	L4	L5	L6	S	max. flow rate [l/min]	max. operating pressure [bar]	weight [app. kg]	type
1/4"	55	28	27	125	248	38	94	/	50	44	30	20	350	1,686	VBCD-14-DE-A
3/8"	60	32	28	150	248	50	110	30	50	44	30	40	350	1,970	VBCD-38-DE-A
1/2"	60	32	28	150	248	50	110	30	50	44	30	60	350	1,916	VBCD-12-DE-A
3/4"	80	40	40	190	304	65	143	44	62,5	64	35	95	350	3,800	VBCD-34-DE-A
1"	90	45	45	210	319	66	158	190	72	/	50	160	350	6,680	VBCD-1-DE-A

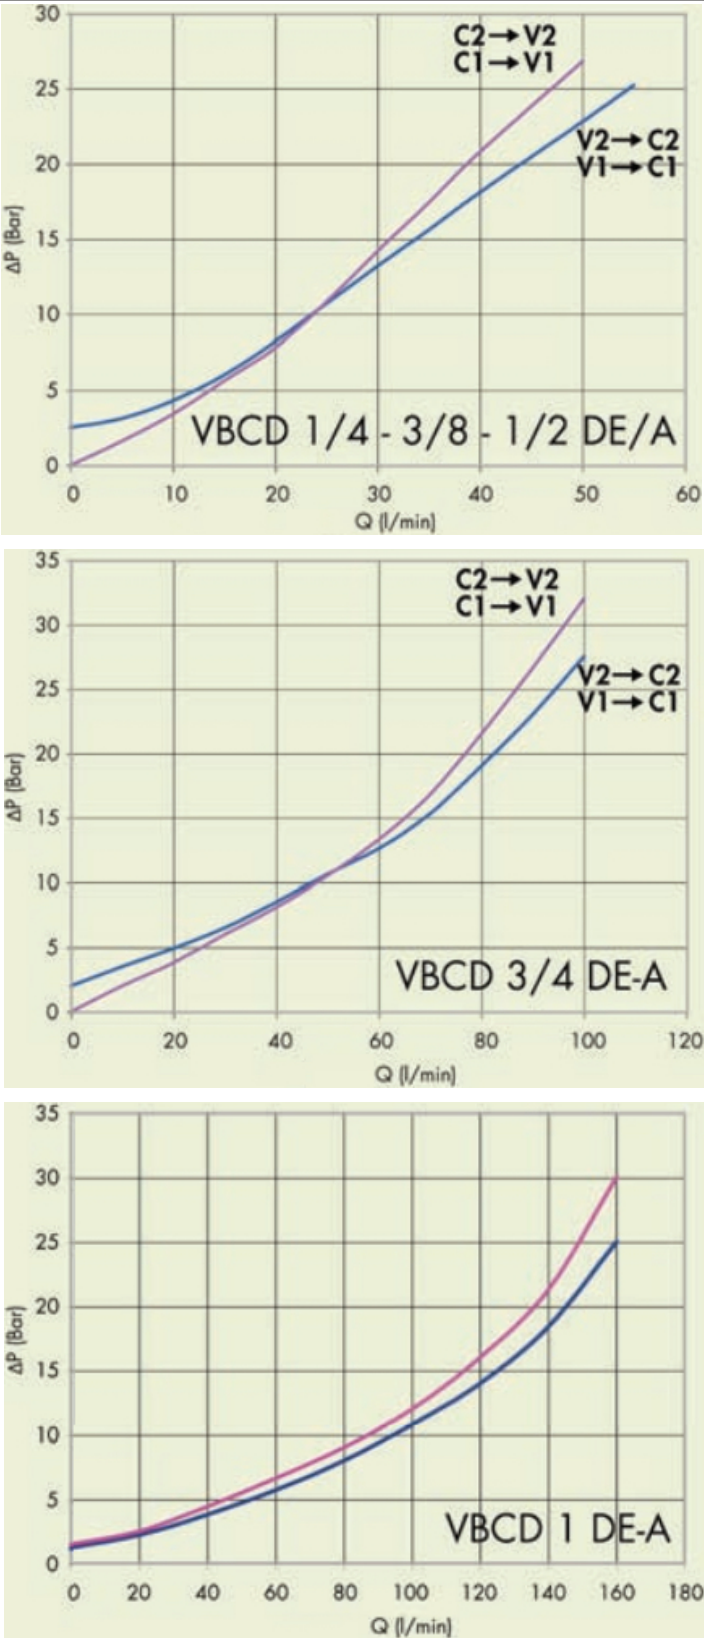

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice