



shuttle valve series VU2P




connection	G1/4"...G1" according to ISO228/1
materials	body zinc plated steel, seals NBR
function	free passage of each side with the higher pressure
medium temperature	-20...+100°C
type of fixing	pipe mounting
medium	hydraulic oil, other media on request

dimensions

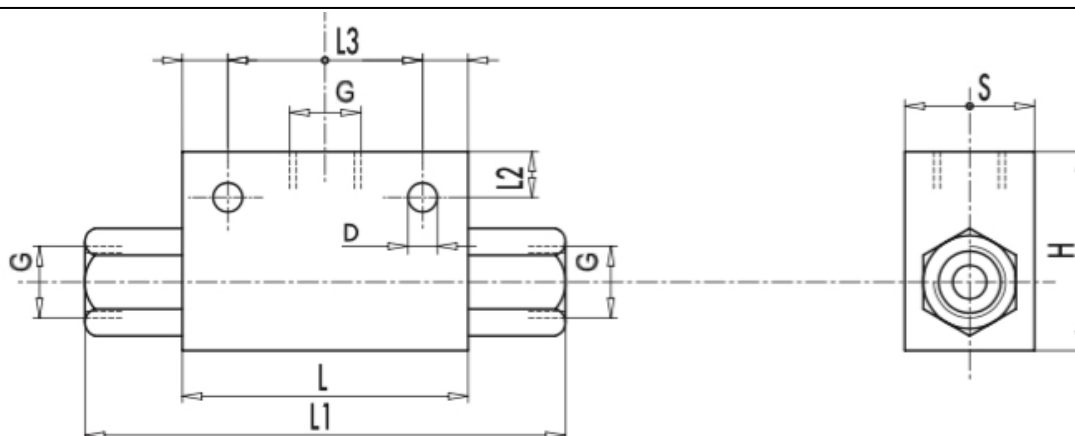

G	D	H	L	L1	L2	L3	S	max. flow rate [l/min]	max. operating pressure [bar]	weight [app. kg]	type
1/4"	8,5	40	60	104	9	44	30	30	350	0,560	VU2P-14
3/8"	8,5	40	60	104	9	44	30	45	350	0,530	VU2P-38
1/2"	8,5	50	60	104	12	44	30	70	350	0,652	VU2P-12
3/4"	8,5	58	80	127	12	44	35	110	350	1,086	VU2P-34
1"	10,5	80	80	126	11	60	50	150	300	2,172	VU2P-1

flow diagrams

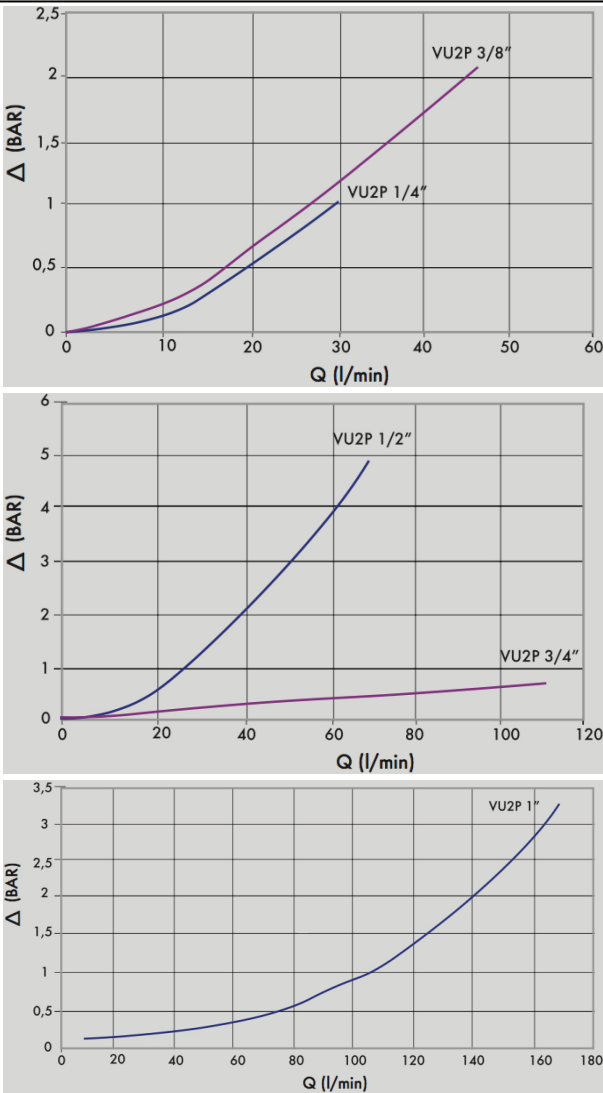

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice