


DIRECTIONAL VALVES


SERIES RPE3-06



Technical Features

- Direct acting, directional control valve with subplate mounting interface acc. to ISO 4401, DIN 24340 (CETOP 03)
- High transmitted hydraulic power up to 350 bar with optimized design to minimize pressure drop
- Five chamber housing design with reduced hydraulic power dependence on fluid viscosity
- The valve is available with interchangeable DC solenoids, also for AC power supply using a built-in rectifier bridge
- Wide range of solenoid electrical terminal versions available
- Wide range of interchangeable spools and manual overrides available
- CSA Certificate upon request
- Inductive contactless Normally Open and Normally Closed spool position sensor option
- Soft-shift spool speed control option
- The coil is fastened to the core tube with a retaining nut and can be rotated by 360° to suit the available space
- In the standard version, the valve housing is phosphated. The steel parts are zinc coated (240 h corrosion protection in NSS acc. to ISO 9227)
- With optional increased surface corrosion protection of the whole valve 520 h in NSS, e.g. for mobile applications

ISO 4401-03-02-0-05

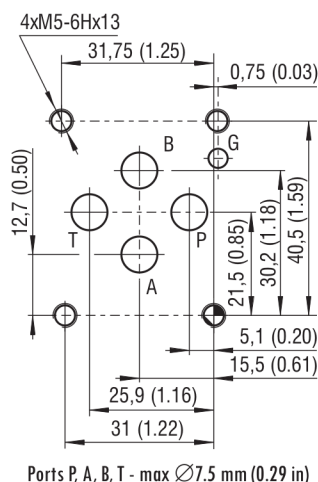


Technical Data

Valve size		06 (D03)	
Max. flow	l/min (GPM)	80 (21.1)	
Max. operating pressure at ports P, A, B	bar (PSI)	standard 350 (5080)	
		320 (4640) acc. to CSA	
Max. operating pressure at port T	bar (PSI)	210 (3050)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +80 (-22 ... +176)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +80 (-4 ... +176)	
Ambient temperature range	°C (°F)	-30 ... +50 (-22 ... +122)	
Supply voltage tolerance	%	AC: ±10	DC: ±10
Max. switching frequency	1/h	15 000	
Switching time at v=32 mm²/s (156 SUS)	ON	AC: 30 ... 40	
	OFF	DC: 30 ... 50	
Weight	- valve with 1 solenoid	1.6 (3.52)	
	- valve with 2 solenoids	2.2 (4.85)	
General information		Type	
Coil types / connectors		Products and operating conditions	
Mounting interface		Size 06	
Spare parts			


Characteristics measured at v = 32 mm²/s (156 SUS)

Operating limits

Operating limits for maximum hydraulic power at rated temperature and supply voltage equal to 90 % nominal.

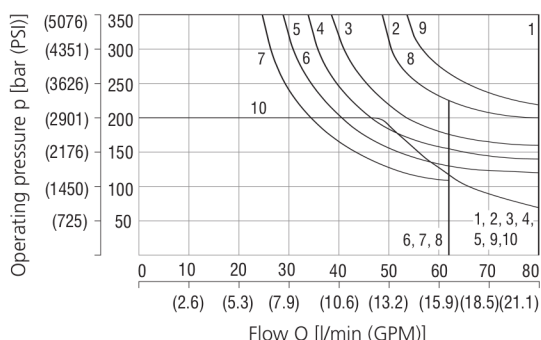

Pressure drop related to flow rate

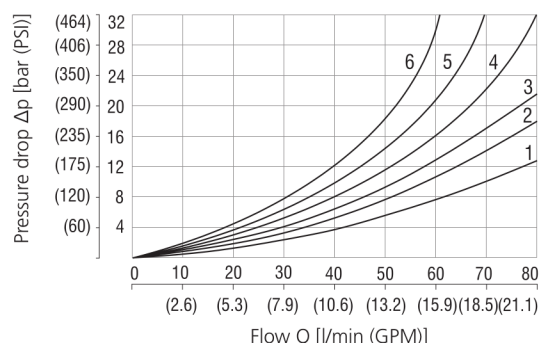

Spool symbol			
1 Z11	5 F11	7 Z91	
6 C11	3 R11	5 R31	
5 H11	4 R21	5 H51	
1 P11	5 A51	7 F51	
2 Y11	1 P51	3 X11	
5 L21	2 Y51	7 K11	
8 B11	6 C51	7 N11	
6 Y41	1 Z51	10 X25	
1 Z21	7 Z71	1 J15	
5 C41	7 Z81	9 J75	

Spool symbol	P-A	P-B	A-T	B-T	P-T	P-A	P-B	A-T	B-T	P-T
Z11,L21,B11,R11	2	2	3	3		P51	1	3		
R21,X11,N11,J15	5	5	5	6	3	Y51	2	2		
C11	2	2	2	3	3	C51	2		3	4
H11	1	1	3	3		Z71	3			
P11	2	2	2	2		Z81		3	3	
Y11	3	3	3	3		Z91	3			3
Y41	2	3				R31	2		3	
Z21,Z51,H51	4	4			5	F51	2	3		
C41	1	2		3	3	K11	2	3		
F11	2	2				X25	3	3	3	
A51,J75										

For operating limits under conditions and flow directions other than shown contact our technical support. Admissible operating limits may be considerably lower with only one direction of flow (A or B plugged, or without flow.)

DIRECTIONAL VALVES

SERIES RPE3-06



4/2 and 4/3
directional control valve,
solenoid operated

Valve size

Number of spool positions

two positions
three positions

Spool symbols

see the table "Spool Symbols"

Rated supply voltage of solenoids

(at the coil terminals)

12 V DC / 2.72 A

24 V DC / 1.29 A

27 V DC / 1.07 A

205 V DC / 0.15 A

24 V AC / 1.56 A / 50 (60 Hz)

120 V AC / 0.26 A / 60 Hz

230 V AC / 0.15 A / 50 (60) Hz

CSA upon request - only for 320 bar (4640 PSI)

Connector

EN 175301-803-A

E1 with quenching diode

AMP Junior Timer - axial direction (2 pins; male)

E3A with quenching diode

EN 175301-803-A with integrated rectifier

Loose conductors (two insulated wires)

E8 with quenching diode

Deutsch DT04-2P - axial direction (2 pins; male)

E12A with quenching diode

- For directional valves with two solenoids, one solenoid must be

de-energized before the other solenoid can be charged.

- For AC voltage supply use coils with connector type E5.

- For other solenoid voltage supply options see data sheet C_8007.

RPE3 - 06



No designation
U

CSA Certified
standard
CSA marking

No designation

A

B

Surface treatment
standard
zinc-coated (ZnCr-3), ISO 9227 (240 h)
zinc-coated (ZnNi), ISO 9227 (520 h)

No designation

S1

S4

Spool monitoring
without sensors
normally-open sensor
normally-closed sensor

No designation

V

Seals
NBR
FPM (Viton)

No designation

T1

Soft-shift spool speed control
without soft-shift control
orifice $\varnothing$ 0.7 mm (0.03 inch) in solenoid

Manual override

standard

cap nut covered

rubber boot protected

detent assembly with the ball

hand screw

socket head screw, size 3

detent assembly with the nut

with ball

without manual override

No designation

N1

N2

N3

N4

N5

N7

N8

N9

- The solenoid operated valves are delivered without connectors. For available connectors see data sheet K_8008.

- The orifice to the P port can be ordered separately, see data sheet SP_8010.

- Mounting bolts M5 x 45 DIN 912-10.9 or studs must be ordered separately. Tightening torque is 8.9+1 Nm (6.56+0.7 lbf.ft).

- Besides the commonly used valve versions shown other special models are available.

Contact our technical support for their identification, feasibility and operating limits.

Spool Symbols

Type	Symbol	Interposition	Type	Symbol	Interposition	Type	Symbol	Interposition
Z11			R11			Z11		
C11			R21			X11		
H11			A51			C11		
P11			P51			H11		
Y11			Y51			K11		
L21			C51			N11		
B11			Z51			F11		
Y41			Z71			X25		
Z21			Z81			J15		
C41			Z91			J75		
F11			R31					
			H51					
			F51					

Abbildungen unverbindlich, Konstruktions-, Maß- und Werkstoffänderungen vorbehalten

illustrations are non-binding, all designs, configurations, measurements and materials are subject to change without prior notice

DIRECTIONAL VALVES SERIES RPE3-06



E1, E2 / IP65	E3A, E4A / IP67	E5 / IP65	E8, E9	E12A, E13A / IP67 / 69K
			 Note: A = Standard 300 mm, (11.8 in) other lengths on demand	


The indicated IP protection level is only achieved if the connector is properly mounted.

Manual Override in millimeters (inches)


No designation - standard	N1- cap nut covered	N2- rubber boot protected	N3 - detent assembly with the ball	N4 - hand screw
N5 - socket head screw, size 3	N7 - detent assembly with the nut	N8 - with ball	N9 - without manual override	In case of solenoid malfunction or power failure, the spool of the valve can be shifted by manual override as long as the pressure in port T does not exceed 25 bar (363 PSI). For alternative manual overrides contact our technical support.

Spool Position Sensor

S1 - Circuit diagram for the normally - OPEN sensor

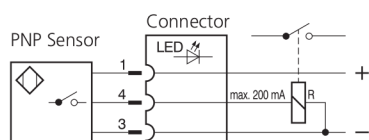

S4 - Circuit diagram for the normally - CLOSED sensor

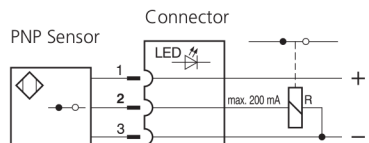

Function of the position sensor:

In the basic position (when the solenoid is switched off), a steel core, connected to the spool, is under the position sensor. The sensor is activated, it means contacts of the sensor S1 are closed and contacts of the sensor S4 are open. After switching on the solenoid the spool with core moves out of the sensor range and the sensor is deactivated.

Technical Data of the Sensor		S1, S4
Rated power supply voltage	V	24 DC
Power supply voltage range	V	10 ... 30 DC
Rated current	mA	200
Sensor enclosure protection (EN 60529)		IP 67
Max. operating pressure at port T	bar (PSI)	210 (3046)
Switching frequency	Hz	1000
Ambient temperature range	°C (°F)	-25 ... +80 (-13 ... +176)
Technical Data of the Connector		
Power supply voltage range	V	10 ... 30 DC
Ambient temperature range	°C (°F)	-25 ... +80 (-13 ... +176)
Indicator		yellow LED



Typical configurations of the valve with a sensor:

- 3-position valve with two solenoids, equipped with two sensors
 - 2-position valve with one solenoid, equipped with one sensor on the solenoid side
 - 2-position valve with a detent assembly of spool, equipped with one sensor on the side of the solenoid which moves the spool from the basic position to the switched position according to the spool symbol
- Note:** the sensor always indicates the change of spool position realised by the energised solenoid, mounted on the side of the sensor.

① Signal of solenoid
③ Signal of sensor

Two-Position Directional Control Valve				
① a(b)	③ Sa(Sb)	LED		
	S1	S4	S1	S4
0	1	0	ON	OFF
1	0	1	OFF	ON

Three-Position Directional Control Valve									
① a(b)		③ Sa(Sb)				LED			
		S1	S4	Sa	Sb	S1	S4	Sa - LED	Sb - LED
a	b	Sa	Sb	Sa	Sb	Sa - LED	Sb - LED	Sa - LED	Sb - LED
0	0	1	1	0	0	ON	ON	OFF	OFF
1	0	0	1	1	0	OFF	ON	ON	OFF
0	1	1	0	0	1	ON	OFF	OFF	ON

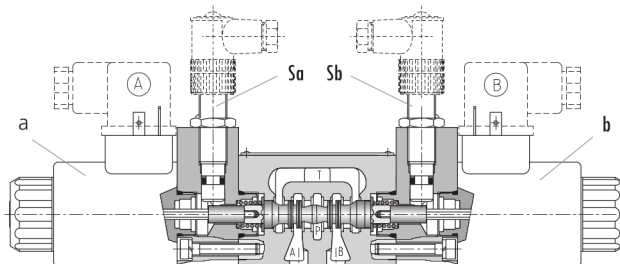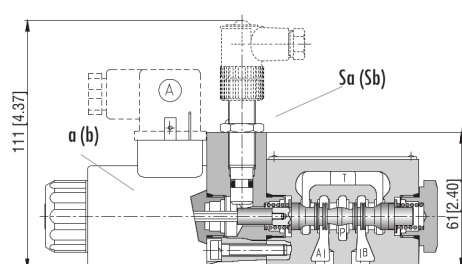

Abbildungen unverbindlich, Konstruktions-, Maß- und Werkstoffänderungen vorbehalten
illustrations are non-binding, all designs, configurations, measurements and materials are subject to change without prior notice


DIRECTIONAL VALVES SERIES RPE3-06




Designation T1	Important:
	This directional valve provides the means to control spool soft shifting by an orifice situated in the solenoid armature. To ensure the proper function of the valve, unobstructed venting of the solenoid is required through the bleeding plug (1). The plugs are accessible after removing the rubber boot (2) from the solenoid cap nut (3).
Switching time ON and OFF	300 ... 800 ms
The switching times shown are valid for viscosity $\nu = 32 \text{ mm}^2/\text{s}$ (156 SUS) and nominal voltage. They depend on working pressure and flow rate of the directional control valve.	

Dimensions in millimeters (inches)


Valve with two solenoids

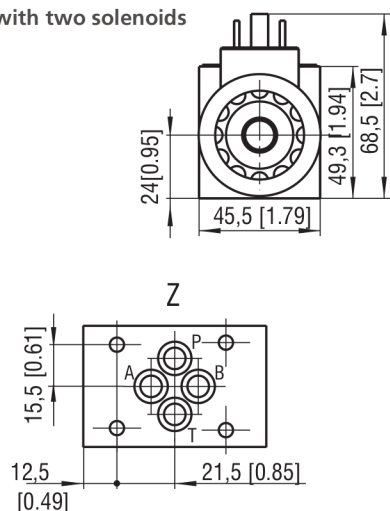

RPE3-063*/E1*


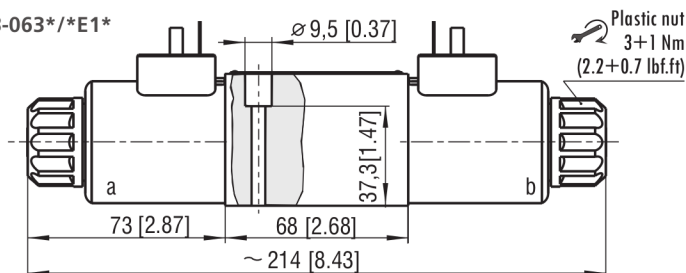


RPE3-063*/E1*S

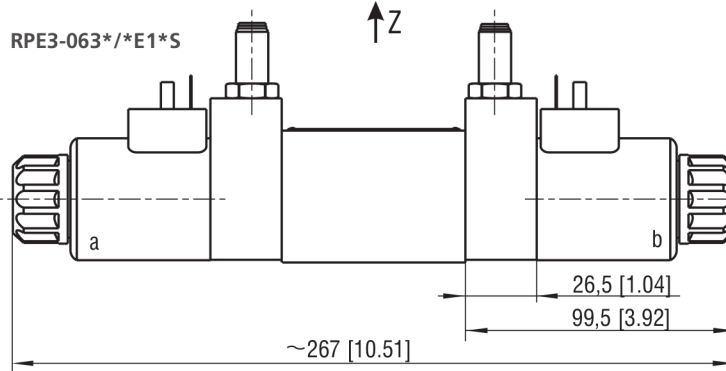


Valve with one solenoid „a“

Spool symbols R11, R21, A51, P51, Y51, Z51, C51, R31, Z71, Z81, Z91, H51, F51, X25

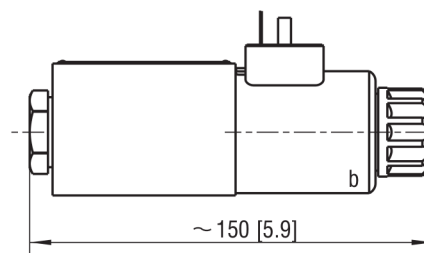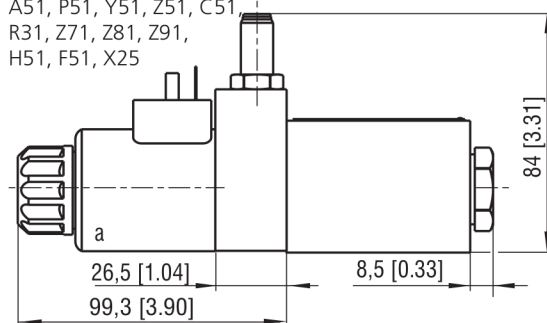

Valve with one solenoid „b“

Spool symbols X11, Z11, C11, H11, K11, N11, F11

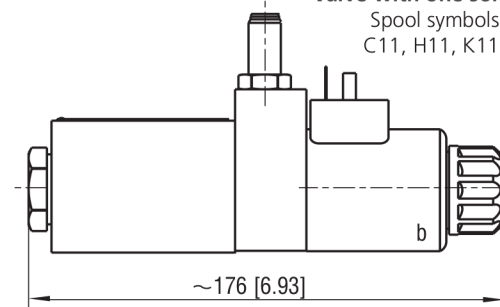

Mounting screws 8.9+1 Nm (6.56+0.7 lbf.ft)
M5x45 DIN 912-10.9