Partnership. With Guarantee.

Way valves - mechanically actuated 1/8" up to 1/4" Series VC

VCMS32 . M .

VCMS52M1 .

VCMS52S1 .

VCLR32.M8

VCLR52M18

VCLR52018

VCLL32.M8

VCLL52M18

Design type	Slide valve, mechanically actuated
Connection	G1/8"...G1/4" according to ISO228/1
Nominal size	G1/8" DN 6mm, G1/4" DN 8mm
Flow rate	G1/8" 650Nl/min, G1/4" 1080Nl/min
Pressure range	0...10bar
Materials	Body Nickel-plated aluminium, Slide valve Stainless steel, Seals NBR
Mounting type	Through bores in the valve body
Mounting position	any
Medium	filtered and lubricated or non-lubricated compressed air
Medium temperature	0...+40°C
Ambient temperature	-10...+50°C
Note	CAD files are available in the STASTO Store at www.stasto.eu

VCMS32 . M8 3/2-way valve G1/8" Cam/spring



	Function	F min.	F max.	Type
	NC	20N	40N	VCMS326M8
	NO	20N	40N	VCMS329M8

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

VCMS32 . M4 3/2-way valve G1/4" Cam/spring

		Function	F min.	F max.	Type
		NC	40N	60N	VCMS326M4
		NO	40N	60N	VCMS329M4

VCMS52M18 5/2-way valve G1/8" Cam/spring

		F min.	F max.	Type
		20N	40N	VCMS52M18

VCMS52M14 5/2-way valve G1/4" Cam/spring

		F min.	F max.	Type
		40N	60N	VCMS52M14

VCMS52S18 5/2-way valve G1/8" Cam/cam

		Type
		VCMS52S18

+43 512 52076
austria@stasto.eu

© STASTO Automation KG

VCMS52S14 5/2-way valve G1/4" Cam/cam

		Type
		VCMS52S14

VCLR32 . M8 3/2-way valve G1/8" Roller/spring

		Function	F min.	F max.	Type
		NC	10N	20N	VCLR326M8
		NO	10N	20N	VCLR329M8

VCLR52M18 5/2-way valve G1/8" Roller/spring

		F min.	F max.	Type
		10N	20N	VCLR52M18

VCLR52018 5/2-way valve G1/8" Roller/roller

		Type
		VCLR52018

+43 512 52076
austria@stasto.eu

© STASTO Automation KG

VCLL326M8 3/2-way valve G1/8" Roller/spring

		Function	Type
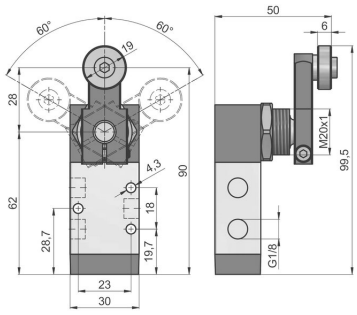		NC	VCLL326M8

VCLL52M18 5/2-way valve G1/8" Roller/spring

		Type
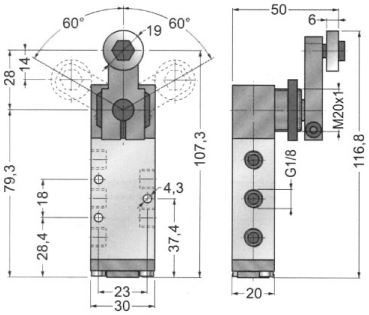		VCLL52M18

Illustrations non-binding
Design, dimensional and material changes reserved

+43 512 52076
austria@stasto.eu
© STASTO Automation KG